

# **A Deep Dive in Scoring Methodology**

**By Bob Sohval, PhD, VP Data Science**



# Table of content

<a href="#"><u>Cybersecurity Ratings</u></a>	4
<a href="#"><u>What do Scores Mean?</u></a>	4
<a href="#"><u>Factor Scores</u></a>	5
<a href="#"><u>Cybersecurity Signals</u></a>	6
<a href="#"><u>Signal Processing Workflow</u></a>	22
<a href="#"><u>Signal Collection</u></a>	23
<a href="#"><u>Attribution Engine</u></a>	23
<a href="#"><u>Cyber Analytics</u></a>	25
<a href="#"><u>Scoring Engine</u></a>	25
<a href="#"><u>Scoring Methodology</u></a>	25
<a href="#"><u>Size Normalization</u></a>	26
<a href="#"><u>Calibration Process</u></a>	28
<a href="#"><u>Calculating Factor Scores</u></a>	28
<a href="#"><u>Calculating Raw Factor Score</u></a>	29
<a href="#"><u>Calculating Total Score</u></a>	29
<a href="#"><u>Breach Penalty</u></a>	30
<a href="#"><u>Keeping the Scoring Framework Current</u></a>	30
<a href="#"><u>Calibration Cadence</u></a>	31
<a href="#"><u>Industry Comparisons</u></a>	31
<a href="#"><u>Collaboration with End Users</u></a>	32
<a href="#"><u>Validation</u></a>	32
<a href="#"><u>Limitations</u></a>	33
<a href="#"><u>FAQ</u></a>	34

**SecurityScorecard** evaluates organizations' security profiles non-intrusively, using an 'outside-in' methodology.

This approach enables **SecurityScorecard** to operate at scale, measuring and updating cybersecurity ratings daily on more than one million organizations globally.

Grade	Score
<b>A</b>	>90
<b>B</b>	80-89
<b>C</b>	70-79
<b>D</b>	60-69
<b>F</b>	<60

## Cybersecurity Ratings

The rise of the internet and its global role in e-commerce, business operations, communications, and social media, has created both opportunities and risks. While it can fuel economic growth and speed up the dissemination of news and ideas, the existence of vulnerabilities in commonly used software products and services, and poor adherence to recommended security practices can expose organizations to significant financial and reputational harm at the hands of malicious actors - including both individuals and nation-states.

Cybersecurity ratings provide a means for objectively monitoring the security hygiene of organizations and gauging whether their security posture is improving or deteriorating over time. The ratings are valuable for vendor risk management programs, determining risk premiums for cyber insurance, credit underwriting and financial trading decisions, M&A due diligence information, executive-level reporting, and for self-monitoring. Cybersecurity ratings and the extensive information on which they are based are also helpful for assessing compliance with cybersecurity risk standards.

## What do Scores Mean?

SecurityScorecard scores provide insights and a detailed analysis of the security posture of an organization. The Total Score, which consists of an easy to understand letter grade A (100) to F (0) and quickly conveys an overall assessment of security hygiene. The Total Score is a weighted average of 10 Factor Scores, which provide useful insights into detected vulnerabilities grouped into different categories.

Cybersecurity ratings can be compared to financial credit ratings. Just as a poor credit rating is associated with a greater probability of default, a poor cybersecurity rating is associated with a higher probability of sustaining a data breach or other adverse cyber event.

Validation of SecurityScorecard scores using statistical analysis demonstrates that companies with an F rating have a 7.7x greater likelihood of incurring a data breach compared to companies with an A.

### Factor Scores

SecurityScorecard calculates and provides detailed reports on 10 different factor scores. The factor scores group and describe different aspects of cyber risk along multiple axes. They allow security teams to identify vulnerable areas and focus their remediation efforts where they will have the greatest impact.

Each factor has a numerical weight, which reflects the severity or risk that the factor contributes to the overall cybersecurity posture. SecurityScorecard utilizes machine learning to optimize the weights of its risk factors. This data-driven approach maximizes the correlation between SecurityScorecard scores and the relative likelihood of breach. The magnitude of the weights are presented categorically in the table displayed here.

An organization's Total Score is calculated as the **weighted average** of its Factor Scores.

Individual Factor Scores are calculated based on the severity and quantity of security issues or findings associated with the factor.

Factor Score of 100 indicates that no cybersecurity issues were detected for that factor.

Factor	Weights
Application Security	Medium
Cubit Score	Medium
DNS Health	Medium
Endpoint Security	High
Hacker Chatter	Low
IP Reputation	High
Information Leak	Low
Network Security	Medium
Patching Cadence	Low
Social Engineering	Low

## Cybersecurity Signals

SecurityScorecard monitors hundreds of different cybersecurity signals and calculates a score based on a defined subset of issues. Each issue is associated with one of the ten risk factor groups and is assigned a weight reflecting its severity. Informational and Positive issues (reflecting good security practice) are captured and presented to users for improved awareness, but do not contribute to score.

The security issues measured by SecurityScorecard, along with the assigned factor, severity-based weight, update cadence and age out window, are presented below.

Issue Type	Factor	Severity	Recommendation	Frequency	Age out
Adware Installation	ip_reputation	MEDIUM	Investigate the devices associated with the IP addresses listed, checking for evidence of adware installations.	Daily*	30
Adware Installation Trail	ip_reputation	INFO	Investigate the devices associated with the IP addresses listed, checking for evidence of adware installations.	Daily*	365
Alleged Breach Incident	hacker_chatter	INFO	Investigate the alleged activity to determine if it can be substantiated and remediate as necessary.	Daily*	None
Anonymous Open Proxy	ip_reputation	HIGH	Review the business necessity of hosting a public proxy server, and remove it from the Internet if possible. If not possible, consider restricting the service by allowlisting the IP addresses that require access, or implementing authentication. If there is no known reason for a proxy service to be present, check for evidence of malware infections or other types of compromise."	Monthly	45
Apache Cassandra Service Observed	network_security	MEDIUM	Exposing database services to the Internet is not recommended. Consider placing the service behind a VPN, preventing public access. If making the service private is not possible, restrict the service by allowlisting the IP addresses that require access.	Monthly	45

Issue Type	Factor	Severity	Recommendation	Frequency	Age out
Apache CouchDB Service Observed	network_security	MEDIUM	Exposing database services to the Internet is not recommended. Consider placing the service behind a VPN, preventing public access. If making the service private is not possible, restrict the service by allowlisting the IP addresses that require access.	Monthly	45
Attack Detected	ip_reputation	MEDIUM	Investigate the devices associated with the IP addresses listed, checking for evidence of malware infections.	Daily*	30
CDN Used	network_security	INFO	Identification of a CDN could be useful information to your customers and partners, and there is no recommended action.	Weekly	45
Certificate Is Expired	network_security	MEDIUM	"Services presenting expired certificates should cause noticeable failures, so confirm the service is still in use. If the service is not in use, decommission it. Otherwise, contact the CA and arrange issuance of a new certificate.		
Certificate Is Revoked	network_security	HIGH	If the service is not in use, decommission it. Otherwise, contact the CA and arrange issuance of a new certificate.	Weekly	45
Certificate Is Self-Signed	network_security	MEDIUM	If the service is not in use, decommission it. Otherwise, contact the CA and arrange issuance of a new certificate.	Weekly	45
Certificate Lifetime Is Longer Than Best Practices	network_security	LOW	If the service is not in use, decommission it. Otherwise, contact the CA and arrange issuance of a new certificate.	Weekly	45
Certificate Signed With Weak Algorithm	network_security	MEDIUM	If the service is not in use, decommission it. Otherwise, contact the CA and arrange issuance of a new certificate.	Weekly	45
Certificate Without Revocation Control	network_security	LOW	If the service is not in use, decommission it. Otherwise, contact the CA and arrange issuance of a new certificate.	Weekly	45

Issue Type	Factor	Severity	Recommendation	Frequency	Age out
Cloud Provider Service Used	network_security	INFO	Identification of a cloud provider service could be useful information to your customers and partners, and there is no recommended action.	Weekly	45
Content Security Policy (CSP) Missing	application_security	MEDIUM	Enable CSP headers via your webserver configuration.	Weekly	15
Content Security Policy Contains 'unsafe-*' Directive	application_security	INFO	Remove the unsafe directives from the content security policy. For trusted resources that must be used inline with HTML, you can use nonces or hashes in your content security policy's source list to mark the resources as trusted. Nonces are randomly generated numbers placed with inline content that you trust. By including the nonce in both the content and the header, the browser knows to trust the script. Example inline script with a nonce: <code>&lt;script nonce=aBFef03ncelOfn39hr3rsatsdfa&gt;alert('Hello, world.');</code> Example policy that allows the inline script to be run without unsafe directives: Content-Security-Policy: script-src 'nonce-aBFef03ncelOfn39hr3rsatsdfa' Warning: For nonces to be effective, they must be randomly regenerated every time the page is loaded. If an attacker can guess the nonce value, the protection is useless. Hashes work similarly to nonces, but only need to be generated once. By taking the hash of a script and including it in the header, it will mark the script as trusted. If the attacker tries to change the script, the hash will change and it will no longer be trusted. Example inline script to be hashed: <code>&lt;script&gt;alert('Hello, world.');</code> Example policy that allows the inline script to be run without unsafe directives: Content-Security-Policy: script-src 'sha256-qznLcsROx4GACP2d-mOUCKCzCGHiZ1guq6ZZDob_Tng="'csp_too_broad_v2	Weekly	15

Issue Type	Factor	Severity	Recommendation	Frequency	Age out
Content Security Policy Contains Broad Directives	application_security	INFO	"Explicitly specify trusted sources for your script-src and object-src policies. Ideally you can use the 'self' directive to limit scripts and objects to only those on your own domain, or you can explicitly specify domains that you trust and rely upon for your site to function."	Weekly	45
cookie_missing_secure_attribute"	Weekly	15	Enable CSP headers via your webserver configuration.	Weekly	15
Cookie Missing 'Secure' Attribute	application_security	LOW	Change the default 'Secure' attribute from FALSE to TRUE to ensure cookies are sent only via HTTPS. The 'Secure' attribute should be set on each cookie to prevent cookies from being observed by malicious actors. Implement the 'Secure' attribute when using the Set-Cookie parameter during authenticated sessions."marketing_site	Weekly	15
Credentials at Risk	leaked_information	LOW	Ensure employees are not using the affected credentials for any corporate or third-party logins. Ensure that all passwords have been changed since the indication of breach. In the case of corporate passwords, check logs for repeated failed login attempts or repeated password reset attempts from suspicious IP addresses."	Daily*	90
Credentials at Risk (Historical)	leaked_information	INFO	Ensure employees are not using the affected credentials for any corporate or third-party logins. Ensure that all passwords have been changed since the indication of breach. In the case of corporate passwords, check logs for repeated failed login attempts or repeated password reset attempts from suspicious IP addresses." services dns	Daily*	n/a
DNS Server Accessible	network_security	INFO	Perform a security audit of your DNS server configuration and apply any necessary controls, such as a firewall or DNS Security Extensions." new_defacement	Weekly	45
Domain Advertised as Ransomware Victim	hacker_chatter	HIGH	Perform a system audit to find how the attackers were able to gain entry. Then fix the issue. This may involve having to reset passwords or deploying other authentication methods. When you verify that no trace of the attacker remains, restore the data from most recent good backups if possible. Make sure to notify parties whose data may have been compromised." domain uses hsts preloading	Daily*	120

Issue Type	Factor	Severity	Recommendation	Frequency	Age out
Domain Uses HSTS Preloading	network_security	POSITIVE	"For the below websites served over HTTPS, ensure that the Strict-Transport-Security header is set with the following flags:\n* includeSubdomains * preload * max-age of at least 31536000 seconds (1 year)\nOnce those steps have been completed, the website may be submitted to https://hstspreload.org for inclusion in Google's preload list. Non-Google Browsers that support HSTS preloading also use this list""	Weekly	45
Elasticsearch Service Observed		HIGH	Remove the service from the Internet. Consider placing the service behind a VPN, preventing public access. If making the service private is not possible, restrict the service by allowlisting the IP addresses that require access." employee satisfaction	Weekly	45
End-of-Life Product	patching_cadence	MEDIUM	Ensure the affected product has an extended support contract that includes security patches. Review the vendor's statement of EOL guidelines for replacement products and upgrade to a new product line or manufacturer."service_end_of_service	Weekly	45
End-of-Service Product	patching_cadence	MEDIUM	Replace or upgrade the affected product. Review the vendor's statement of EOS guidelines for replacement products or contact the vendor. In some cases, it may be possible to negotiate a custom support plan for the EOS product."exposed_personal_information	Weekly	45
Exposed Personal Information	social_engineering	LOW	It's not feasible to remove the information off the internet once exposed so mitigation against social engineering attacks are recommended. Ensure that:\n* employees have regular cyber security awareness training * protocols are established for handling sensitive information * periodic, unannounced, tests are performed."exposed_personal_information_info	Daily*	90
Exposed Personal Information (Historical)	social_engineering	INFO	"It's not feasible to remove the information off the internet once exposed so mitigation against social engineering attacks are recommended. Ensure that:\n* employees have regular cyber security awareness training * protocols are established for handling sensitive information * periodic, unannounced, tests are performed.""admin_subdomain_v2	Daily*	120

Issue Type	Factor	Severity	Recommendation	Frequency	Age out
Exposed Subdomain	cubit_score	LOW	Resolve all private subdomains using a segregated, internal DNS server. If public exposure is required for these subdomains, it is advised that the integration prevent unauthorized access to the subdomains, either through exploitation or credential compromise. Implementing an IP whitelist for access to internal administrative subdomains would restrict unauthorized access attempts from successfully connecting via the public Internet."tscert_extended_validation	Weekly	15
FTP Service Observed	network_security	LOW	Review the business necessity of hosting a public FTP server, and remove it from the Internet if possible. If not possible, consider restricting the service by allowlisting the IP addresses that require access."patching_cadence_high	Weekly	45
High Severity CVEs Patching Cadence	patching_cadence	HIGH	"Monitor CVE lists and vulnerability repositories for exploit code that may affect your infrastructure. Subscribe to the BugTraq mailing list to be alerted to new exploits and vulnerabilities as they are released. Maintain a regular updating schedule for all software and hardware in use within your enterprise, ensuring that all the latest patches are implemented as they are released."web_vuln_host_high	Weekly	45
High Severity Content Management System vulnerabilities identified	application_security	HIGH	To resolve this issue, review the version of the CMS and plug-ins in use and ensure that they are updated. Put in place a system of constant CMS patching and reviews of new vulnerabilities from the security center of the CMS developer site."service_vuln_host_high	Weekly	45

Issue Type	Factor	Severity	Recommendation	Frequency	Age out
High-Severity Vulnerability in Last Observation	patching_cadence	HIGH	Update or patch affected software and hardware. Enable automatic updates if available from your software vendor and permitted in your environment. Monitor CVE lists and vulnerability repositories for exploit code that may affect your infrastructure. Subscribe to the Bugtraq mailing list to be alerted to new exploits and vulnerabilities as they are released. Maintain a regular update schedule for all software and hardware in use within your organization, ensuring that all the latest patches are applied soon after they are released."service_imap	Weekly	45
IMAP Service Observed	network_security	INFO	Review the business necessity of hosting a public IMAP server, and remove it from the Internet if possible. If not possible, consider restricting the service by allowlisting the IP addresses that require access."iot camera	weekly	45
IP Camera Accessible	network_security	LOW	Review the business necessity of exposing a public IP camera feed. Only keep it open when necessary, for example, for a purposely open feed. Even then, you could embed it in a website without exposing the underlying camera IP. If removal is not possible,	weekly	45
Industrial Control System Device Accessible	network_security	HIGH	"Review the business necessity of exposing an ICS device, such as Modbus, DNP3, BACNET, or other critical infrastructure devices. Place such devices behind a VPN or firewall. If it is not possible to remove the service from the internet, consider restricting the service by adding to an allow list the IPs required to access the camera."consider restricting the service by adding dependent IPs to an allow list.""	Weekly	45
Insecure HTTPS Redirect Pattern	application_security	MEDIUM	Any HTTP site should redirect the user to a secure (i.e. HTTPS) version of the same domain that was originally requested (or a higher-level/parent version of that same domain). For example, http://www.example.com should only redirect either to https://www.	Weekly	15

Issue Type	Factor	Severity	Recommendation	Frequency	Age out
LDAP Server Accessible	network_security	MEDIUM	Observe security best practices for your LDAP server and apply controls, such as using TLS to encrypt sessions.	Weekly	45
LDAP Server Allows Anonymous Binding	network_security	LOW	Disable anonymous binding on your LDAP server, which is easy to do.	Weekly	45
Low Severity CVEs Patching Cadence	patching_cadence	LOW	"Monitor CVE lists and vulnerability repositories for exploit code that may affect your infrastructure. Subscribe to the BugTraq mailing list to be alerted to new exploits and vulnerabilities as they are released. Maintain a regular updating schedule for all software and hardware in use within your enterprise, ensuring that all the latest patches are implemented as they are released."	weekly	45
Low Severity Content Management System vulnerabilities identified	application_security	LOW	To resolve this issue, review the version of the CMS and plug-ins in use and ensure that they are updated. Put in place a system of constant CMS patching and reviews of new vulnerabilities from the security center of the CMS developer site.	Weekly	45
Low-Severity Vulnerability in Last Observation	patching_cadence	LOW	Update or patch affected software and hardware. Enable automatic updates if available from your software vendor and permitted in your environment. Monitor CVE lists and vulnerability repositories for exploit code that may affect your infrastructure. Subscr	Weekly	45
Malformed SPF Record	dns_health	LOW	A malformed SPF record can occur as the result of different conditions including: creating multiple SPF records per domain, invalid modifiers, and reaching maximum number of modifiers. The SPF standard can be found at <a href="https://tools.ietf.org/html/rfc7208">https://tools.ietf.org/html/rfc7208</a> . A	Weekly	45

Issue Type	Factor	Severity	Recommendation	Frequency	Age out
Malware Controller Observed	ip_reputation	HIGH	Investigate the devices associated with the IP addresses listed, checking for evidence of malware infections.	Daily*	30
Malware Infection	ip_reputation	HIGH	Investigate the devices associated with the IP addresses listed, checking for evidence of malware infections.	Daily*	30
Malware Infection Trail	ip_reputation	INFO	Investigate the devices associated with the IP addresses listed, checking for evidence of malware infections.	Daily*	30
Medium Severity CVEs Patching Cadence	patching_cadence	MEDIUM	"Monitor CVE lists and vulnerability repositories for exploit code that may affect your infrastructure. Subscribe to the BugTraq mailing list to be alerted to new exploits and vulnerabilities as they are released. Maintain a regular updating schedule for all software and hardware in use within your enterprise, ensuring that all the latest patches are implemented as they are released."	Weekly	45
Medium Severity Content Management System vulnerabilities identified	application_security	MEDIUM	To resolve this issue, review the version of the CMS and plug-ins in use and ensure that they are updated. Put in place a system of constant CMS patching and reviews of new vulnerabilities from the security center of the CMS developer site.	Weekly	45
Medium-Severity Vulnerability in Last Observation	patching_cadence	MEDIUM	"Update or patch affected software and hardware. Enable automatic updates if available from your software vendor and permitted in your environment. Monitor CVE lists and vulnerability repositories for exploit code that may affect your infrastructure. Subscribe to the Bugtraq mailing list to be alerted to new exploits and vulnerabilities as they are released. Maintain a regular update schedule for all software and hardware in use within your organization, ensuring that all the latest patches are applied soon after they are released."		
Microsoft SQL Server Service Observed	network_security	MEDIUM	Exposing database services to the Internet is not recommended. Consider placing the service behind a VPN, preventing public access. If making the service private is not possible, restrict the service by allowlisting the IP addresses that require access.	Weekly	45

Issue Type	Factor	Severity	Recommendation	Frequency	Age out
Minecraft Server Accessible	network_security	INFO	Unless you are an ISP or hosting provider, there is no need to run an externally exposed Minecraft server on your network. If you do, add people approved for access to an allow list on a firewall.	Weekly	45
MongoDB Service Observed	network_security	HIGH	Exposing database services to the Internet is not recommended. Consider placing the service behind a VPN, preventing public access. If making the service private is not possible, restrict the service by allowlisting the IP addresses that require access.	Weekly	45
MySQL Service Observed	network_security	MEDIUM	Exposing database services to the Internet is not recommended. Consider placing the service behind a VPN, preventing public access. If making the service private is not possible, restrict the service by allowlisting the IP addresses that require access.	Weekly	45
Neo4j Database Accessible	network_security	HIGH	Move the Neo4J database onto a VPN, or behind a firewall.	Weekly	45
Networking Service Observed	network_security	INFO	This issue type concerns a networking service or device, such as a router or service that is associated with routers like BGP, a firewall, or tunneling service. No change or update to your internet-facing assets is necessary.	Weekly	45
Object Storage Bucket with Risky ACL	application_security	INFO	Remove the affected grants, since they allow entities not associated with your organization to change the bucket.	Weekly	15
Open DNS Resolver Detected	dns_health	MEDIUM	According to the Open Resolver Project, the following DNS configurations should be implemented to avoid becoming a target for abuse. Recursive servers should be limited only to enterprise or customer IP ranges, and not accept connections from IP addresses	Weekly	45
OpenVPN Device Accessible	network_security	MEDIUM	This issue type concerns a router, server, or networking device that is running OpenVPN on your network. No change or update to your internet-facing assets is necessary, but examining such devices for evidence of compromise is recommended.	Weekly	45

Issue Type	Factor	Severity	Recommendation	Frequency	Age out
Oracle Database Server Accessible	network_security	HIGH	Move the Oracle database onto a VPN or behind a firewall, and only allow dependent applications to access it.	Weekly	45
Outdated Operating System Observed	endpoint_security	HIGH	"Update affected device's operating system. Enable automatic updates if available from your software vendor and permitted in your environment. Maintain a regular update schedule for all software and hardware in use within your organization, ensuring that all the latest patches are applied soon after they are released."	Weekly	45
Outdated Web Browser Observed	endpoint_security	HIGH	Update the web browsers in question. Enable automatic updates if available from your web browser vendor and permitted in your environment.	Daily*	45
POP3 Service Observed	network_security	INFO	Review the business necessity of hosting a public POP3 server, and remove it from the Internet if possible. If not possible, consider restricting the service by allowlisting the IP addresses that require access.	Weekly	45
PPTP Service Accessible	network_security	MEDIUM	Review the business necessity of running a PPTP service on your network. PPTP is an obsolete and insecure method for implementing VPNs. Migrate the service to a more secure VPN implementation, such as OpenVPN.	Weekly	45
Phishing Infrastructure	ip_reputation	HIGH	Investigate the devices associated with the IP addresses listed, checking for evidence of malware infections.	Daily*	45
Possible Typosquat Domains Detected	cubit_score	INFO	Verify that the typosquat domain does not pose a risk to the organization. If necessary, perform a domain take-down of malicious domains which may be used for phishing.	Weekly	None

Issue Type	Factor	Severity	Recommendation	Frequency	Age out
PostgreSQL Service Observed	network_security	MEDIUM	Exposing database services to the Internet is not recommended. Consider placing the service behind a VPN, preventing public access. If making the service private is not possible, restrict the service by allowlisting the IP addresses that require access.	Weekly	45
Products Susceptible To Ransomware Exploits Exposed	ip_reputation	MEDIUM	Update your internet-facing products that are susceptible to ransomware attacks, evaluate the necessity of exposing them to the internet, and tightly limit their access based on business need, if possible.	Weekly	1
Pulse Connect Secure VPN Product Observed	network_security	MEDIUM	This issue type concerns Pulse Connect Secure VPN running on routers, servers, or networking devices on your network. No change or update to your internet-facing assets is immediately necessary, but examining devices that run the VPN is recommended.	Weekly	45
RDP Service Observed	network_security	MEDIUM	Exposing remote access services to the Internet is not recommended. Consider placing the service behind a VPN, preventing public access. If making the service private is not possible, restrict the service by allowlisting the IP addresses that require access ransomware_association	Weekly	45
Ransomware-Susceptible Remote Access Services Exposed	cubit_score	HIGH	Determine the business need of exposing these services to the public internet. If possible, isolate them behind a secure, patched VPN service or firewall with appropriate allowlisting for approved users. If they must be exposed, keep the services patched	Weekly	1
Redirect Chain Contains HTTP	application_security	MEDIUM	Any HTTP site should immediately redirect users to HTTPS-protected URLs and ensure that any further redirects do not occur over HTTP. Prefer the usage of HTTPS URLs over HTTP when available, avoiding an unnecessary redirect.	Weekly	15

Issue Type	Factor	Severity	Recommendation	Frequency	Age out
Redis Service Observed	network_security	MEDIUM	Exposing database services to the Internet is not recommended. Consider placing the service behind a VPN, preventing public access. If making the service private is not possible, restrict the service by allowlisting the IP addresses that require access.	Weekly	45
Remote Access Service Observed	network_security	MEDIUM	"This issue type concerns a remote access service, such as a router providing a remote login service, or a Windows server providing a remote assistance service. Examine devices on a case-by-case basis, but no change or update to your internet-facing asset is immediately necessary. ""	Weekly	1
SMB Service Observed	network_security	MEDIUM	Exposing SMB to the Internet is not recommended. Consider placing the service behind a VPN, preventing public access. If making the service private is not possible, restrict the service by allowlisting the IP addresses that require access.	Weekly	45
SMTP Server on Unusual Port	ip_reputation	MEDIUM	Determine whether your organization intended for the identified SMTP server to be running on an unusual port. If not, investigate why and remediate accordingly.	Weekly	45
SOAP Server Accessible	network_security	INFO	This issue type concerns a device running an exposed SOAP service on your network, which could be serving web application traffic, device traffic, or other control services.	Weekly	45
SPF Record Contains Wildcard	dns_health	LOW	To resolve this issue, enumerate the list of email servers that are authorized to send email on behalf of the domain. Update the SPF record with the correct email authorization list.	Weekly	15
SPF Record Contains a Softfail	dns_health	LOW	To resolve this issue, enumerate the list of email servers that are authorized to send email on behalf of the domain. Update the SPF record with the correct email authorization list.	Weekly	15

Issue Type	Factor	Severity	Recommendation	Frequency	Age out
SPF Record Missing	dns_health	MEDIUM	"Create a valid Sender Policy Framework (SPF) record. Ensure the configuration of the SPF DNS record to verify syntax and MTA servers. Test the configuration to make sure its valid by checking the header of an incoming email looking for ""spf=pass"" Allow for DNS caching during testing; it may take up to 48 hours to fully propagate across the Internet. The nature of the SMTP protocol does not allow for complete prevention of spoofed emails, however the SPF header will reveal whether the email is authentic."	Weekly	45
SSH Software Supports Vulnerable Protocol	network_security	HIGH	"Configure the SSH service to support only SSH protocol version 2 or	Weekly	45
SSH Supports Weak Cipher	network_security	MEDIUM	Configure the SSH server to disable Arcfour and CBC ciphers.	Weekly	55
SSH Supports Weak MAC	network_security	MEDIUM	Configure the SSH server to disable the use of MD5.	Weekly	55
SSL/TLS Service Supports Weak Protocol	network_security	HIGH	Disable the protocols listed in the evidence column of the measurement.	Weekly	45
Session Cookie Missing 'HttpOnly' Attribute	application_security	LOW	Set session cookies with the 'HttpOnly' attribute to ensure they can not be accessed by any other means. A cookie marked with 'HttpOnly' will prevent any malicious injected scripts from being able to access it.	Weekly	15
Site does not enforce HTTPS	application_security	HIGH	Any site served to a user (possibly at the end of a redirect chain) should be served over HTTPS.	Weekly	15
Suspicious Traffic Observed	ip_reputation	INFO	Investigate the devices associated with the IP addresses listed, checking for evidence of malware infections or other types of compromise.	Daily*	30

Issue Type	Factor	Severity	Recommendation	Frequency	Age out
TLS Certificate Status Request ("OCSP Stapling") Detected	network_security	POSITIVE	"There are no drawbacks to implementing OCSP stapling and servers should adopt this practice wherever possible. In addition to providing clear security benefits, implementation of OCSP stapling removes the need for maintenance of CRLs and can vastly reduce the traffic on organization-owned OCSP servers, which also provides operational benefits."	Weekly	45
TLS Service Supports Weak Cipher Suite	network_security	MEDIUM	Disable the cipher suites listed in the evidence column of the measurement.	Weekly	45
Telephony/VoIP Device Accessible	network_security	INFO	This issue type is an internet-facing telephony service or device, such as a VoIP product or service associated with SIP, a SIP proxy, or similar protocols. No change is necessary, as there is no inherent risk.	Weekly	45
Telnet Service Observed	network_security	LOW	"Telnet is an inherently unsafe protocol. Remove the service from the Internet. If a remote access service is necessary, replace Telnet with SSH if possible. If not possible, often the case with older networked hardware, ensure the service is only accessible by VPN."	Weekly	15
UPnP Accessible	network_security	INFO	Review the business need of exposing UPnP-enabled devices. Hide them behind a firewall, or make them accessible only on an intranet.	Weekly	45
Unsafe Implementation Of Subresource Integrity	application_security	INFO	"Please ensure that all website elements (i.e. <script> and <link>) loading JavaScript and CSS stylesheets hosted with external organizations contain the 'integrity' directive with a valid checksum.	Weekly	15


Issue Type	Factor	Severity	Recommendation	Frequency	Age out
VNC Service Observed	network_security	MEDIUM	"Exposing remote access services to the Internet is not recommended. Consider placing the service behind a VPN, preventing public access. If making the service private is not possible, restrict the service by allowlisting the IP addresses that require access.""	Weekly	45
Web Application Firewall (WAF) Detected	application_security	POSITIVE	Companies should consider implementing a web application firewall that can protect against common web vulnerabilities, such as SQL Injection and cross-site scripting (XSS). Many hosting providers offer WAF capabilities as well.	Weekly	15
Website Does Not Implement HSTS Best Practices	application_security	MEDIUM	Every web application (and any URLs traversed to arrive at the website via redirects) should set the HSTS header to remain in effect for at least 12 months (31536000 seconds). It is also recommended to set the 'includeSubDomains' directive so that request	Weekly	15
Website Hosted on Object Storage	application_security	INFO	Ensure that the usage of external services, such as Amazon S3, conforms to company policies.	Weekly	15
Website References Object Storage	application_security	INFO	Ensure that the usage of external services, such as Amazon S3, conforms to company policies.	Weekly	15
Website does not implement X-Content-Type-Options Best Practices	application_security	LOW	Add the following header to responses from this website: 'X-Content-Type-Options: nosniff'	Weekly	15
Website does not implement X-Frame-Options Best Practices	application_security	LOW	Add one of the following headers, using the 'DENY' or 'ALLOW-FROM' directive, to responses from this website: X-Frame-Options: DENY' X-Frame-Options: ALLOW-FROM https://example.com/'	Weekly	15

Issue Type	Factor	Severity	Recommendation	Frequency	Age out
Website does not implement X-XSS-Protection Best Practices	application_security	INFO	Add the following header to responses from this website: 'X-XSS-Protection: 1; mode=block'	Weekly	15
rsync Service Observed	network_security	MEDIUM	Exposing rsync services to the Internet is not recommended. Consider placing the service behind a VPN, preventing public access. If making the service private is not possible, restrict the service by allowlisting the IP addresses that require access.	Weekly	45

\*(depending on the availability of data)

## Signal Processing Workflow

Generating meaningful cybersecurity ratings consists of four distinct processing stages: Signal Collection, Attribution Engine, Cyber Analytics, and Scoring Engine.

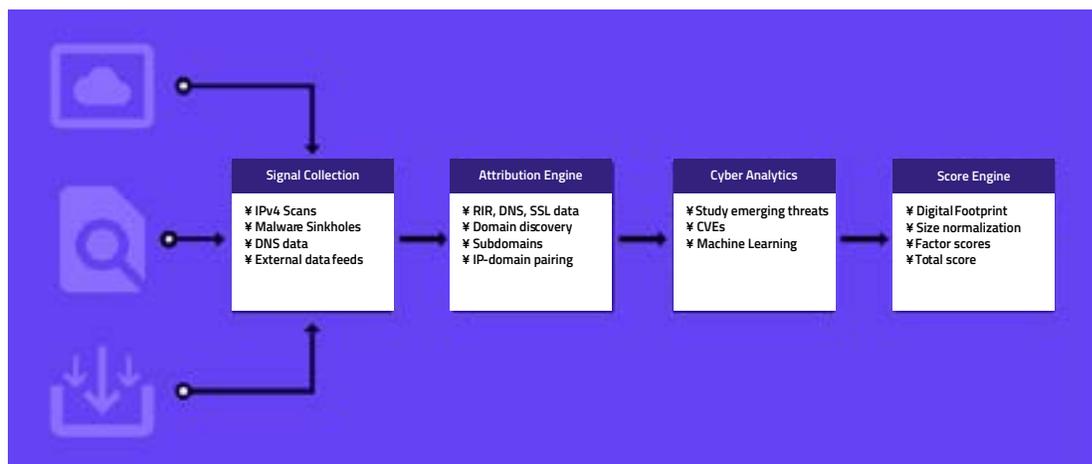

## Signal Collection

SecurityScorecard scans the entire IPv4 web space at a regular cadence to identify vulnerable digital assets.

Additionally, SecurityScorecard monitors signals across the internet, relying on a global network of sensors that spans the Americas, Asia, and Europe. We operate one of the world's largest networks of sinkholes and honeypots to capture malware signals and further enrich our data set by leveraging commercial and open-source intelligence sources.

SecurityScorecard supplements its data collection with external feeds from approximately 40 third-party public and commercial data sources.

SecurityScorecard ingests approximately 1.5 Terabytes of data daily as part of our signal collections program.

## Attribution Engine

Most of the signals collected are associated with an IP or related domain, which must then be matched with an organization, based on its digital footprint.

Attribution of IPs is a challenging process due to the dynamic nature of the internet. Large netblocks of IPs are typically allocated statically to an organization, while smaller netblocks may be assigned dynamically by Internet Service Providers (ISP), Cloud Service Providers (CSP), and Content Delivery Networks (CDN). Notably, these can change by the day or even by the hour. Furthermore, due to the distributed nature of the internet, DNS updates can take time to propagate across the web.

Fundamentally, attribution is a stochastic or probabilistic process, rather than a deterministic one. This means that on a practical basis, attribution can never be 100% accurate. However, with good quality data sources and advanced algorithms, the error rate can be held to a reasonably low level.

SecurityScorecard performs attribution using automated processes operating at internet scale, incorporating machine learning algorithms to optimize accuracy.

SecurityScorecard attributes IPs to domains using RIR, DNS, and SSL data as well as third party data feeds. As each data source has its own confidence level, the data sources are aggregated for each candidate domain-IP pair and the domain-IP pair is accepted if the overall confidence level is satisfactory. The IP digital footprints are updated daily.

In addition to IP attribution, SecurityScorecard operates a domain discovery process to find related domains and subdomains that are controlled by each scored organization.

For each scorecard, SecurityScorecard utilizes the Domain WHOIS service as well as passive DNS sources to generate a list of related domains. The list is then processed using statistical techniques and substring matching to retain only high confidence related domains.

Based on pentesting by independent experts, the False Positive Rate for incorrectly attributing a domain to an organization is typically less than 5%.

Subdomain discovery is performed using a set of publicly available data sources, including CommonCrawl and SSL certifications, as well as several commercially available data feeds. Since subdomains are resolved to DNS A records and are owned by the parent domain, the effective False Positive rate is near zero.

Based on a independent assessment by security firm, the **False Positive Rate** or domain attribution was close to 0.

## Cyber Analytics

SecurityScorecard deploys a suite of analytics developed by its Threat Intel researchers, Data Scientists, and Software Engineers to extract and derive key insights from the raw input signals.

Examples of key analytics, engineering and data processing include:

- Reverse engineering of malware families to enable identification of different malware strains and characterization of their behavior and threat level.
- Identification of CVEs and other vulnerabilities based on examination of digital assets returned from banner grabs as well as analysis of website code base, communication protocols, and SSL certifications.
- Application of machine learning algorithms to improve the quality and accuracy of security findings and provide key insights on security posture.

## Scoring Engine

Scoring is a deterministic process based on an organization's digital footprint and observed risk signals. SecurityScorecard's scoring engine publishes and updates scores daily on more than 1.5 million organizations around the world. Our scoring methodology is described below.

## Scoring Methodology

A unique challenge in providing fair and accurate ratings for organizational cybersecurity is properly accounting for the wide range of organizational sizes. Smaller entities, such as "MomAndPop.com" bearing a small digital footprint with just a single or a few IPs, will inevitably have fewer findings and correspondingly fewer security flaws compared to large enterprises operating over as many as hundreds of millions of IPs.

Conversely, larger entities will nearly always have more security defects than smaller entities and would receive worse security scores if no correction were made for the size of the digital footprint.

## Size Normalization

To eliminate bias due to size, SecurityScorecard developed a principled scoring methodology based on a robust, statistical framework that ensures fair scores regardless of organization size.


Many types of security issues scale with the size of the organization. Larger organizations typically have a larger “attack surface” compared to smaller entities. More employees mean more devices to be protected and more servers mean more chances for an exposed port which should properly sit behind a firewall. Some issue types scale with the number of IPs. Others might scale with the number of related domains or number of employees.

As noted above, the digital footprint of different organizations can vary from a single IP to hundreds of millions of IPs. This range spans more than eight orders of magnitude, or more than eight multiples of ten. The best way to make meaningful measurements over such a large dynamic range is to use a logarithmic scale, where each increment corresponds to a multiple of 10.

Other common examples where a logarithmic scale is used to compare measurements spanning a wide dynamic range include the following:

- Richter scale for measuring earthquakes over more than 9 order of magnitude.
- Decibel scale for measuring sound amplitude over 12 orders of magnitude.
- pH scale for measuring chemical acidity over 14 orders of magnitude.

Size normalization begins with scatter plots to capture how the number of occurrences of a given issue varies with organization size.

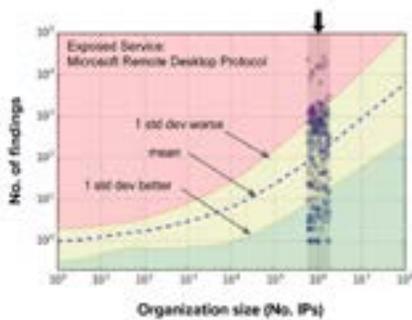

For each organization and each security issue, the number of occurrences of the issue type is captured. The example shown here is open port 3389, which corresponds to Microsoft’s Remote Desktop Protocol. A scatter plot is generated in which every scored entity represents a point on a log-log plot of the logarithm of the number of issue counts (y-axis) vs. the logarithm of the number of IPs (x-axis). A typical scatter plot will contain millions of data points, providing a large statistical “mass” for better accuracy and stability.


The large quantity of organizations scored by SecurityScorecard - currently more than 1.5 million - helps ensure an accurate characterization of the distribution of the number of occurrences of each issue type with organization size, resulting in more accurate scoring.

The size normalization process enables SecurityScorecard to provide score context for its users. In the example shown here, the company has 3 instances of DNS Open Resolver, a misconfiguration of DNS services that can be exploited by malicious actors to launch a DDoS attack, potentially causing business interruption and reputational harm. Based on SecurityScorecard’s analysis of 1.5 million organizations, only 12% of entities of comparable size have this security flaw. Furthermore, among those similarly sized companies that do have the same flaw, the average number of such findings is 2, while this company has 3 findings, which is worse than average.

**COMPARISON TO SIMILAR COMPANIES**



■ 12% have this issue, **just like this company**  
 ■ 88% do not have this issue



■ 2 findings on average  
 ■ 3 findings for this company

## Calibration Process

SecurityScorecard generates a scatter plot similar to the example for every scored issue type. A locally-weighted, nonparametric fitting algorithm is then applied to characterize both the mean (blue dashed curve) and the standard deviation of the number of expected issue counts as functions of organization size.

It is noteworthy that the dependence of issue counts on organization size is non-linear (the dashed blue line is curved). Simply assuming that the number of issue counts scales linearly with size would introduce serious errors, resulting in systematically distorted and incorrect cybersecurity scores.

This calibration process is carried out for every scored issue type, using data collected over a 2-month time interval to smooth out statistical fluctuations.

This process enables fair performance comparisons of organizations to others of similar size. In the example scatter plot, an organization in the red zone is at least 1 standard deviation worse than the mean, while an organization in the green zone is at least 1 standard deviation better than the mean. This approach ensures that comparisons are always made relative to other organizations of similar size.

## Calculating Factor Scores

The calibration process described above enables a reliable and stable statistical estimate to be calculated for a given organization and security issue, corresponding to how many standard deviations above or below the mean that organization is situated for the particular security issue. In statistical parlance, this is known as a “z-score”.

SecurityScorecard uses a “modified z-score”, where  $z = 0$  if no findings are present, while  $z = 1$  when the number of findings equals the mean for entities with the same size digital footprint. In this framework,  $0 \leq z < 1$  corresponds to better than average, while  $z > 1$  corresponds to worse than average.

## Calculating Raw Factor Score

Each factor comprises issue types that are topically related, e.g. Network Security, Application Security, etc.. The weighted sum of the issue-level z-scores is used to compute

$$RFS_d = \sum_{i \in f} w_i \times z_{di}$$

The modified z-scores are calculated and updated daily for every entity and every issue type monitored on the SecurityScorecard platform.

This approach ensures inherently low score volatility.

If an entity's digital footprint and issue counts are stable, then its security score will be unchanged.

where  $RFS_d$  is the raw factor score for domain  $d$ ,  $w_i$  is the severity-based weight for issue  $i$ , and  $z_{di}$  is the z-score for domain  $d$  and issue  $i$ . The sum is calculated over all issues  $i$  in factor  $f$ .

**Note:** for issues that are informational only or positive, the weight  $w_i = 0$ .

Informational and positive issues do not contribute to the score. Raw factor scores are converted to final factor scores using a scaling transformation to stretch the factor scores from 0 to a maximum of 100.

## Calculating Total Score

Finally, the Total Score is calculated as the weighted average of the individual factor scores:

$$TS_d = \frac{\sum_f w_f \times g(FS_{df}) \times FS_{df}}{\sum_f w_f \times g(FS_{df})}$$

where  $TS_d$  is the total score for domain  $d$ ,  $w_f$  is the severity-based weight of factor  $f$ ,  $FS_{df}$  is the factor score for domain  $d$  and factor  $f$ , and  $g(\cdot)$  is a non-linear weighting function which gives greater emphasis to low factor scores. The rationale is that in a security context, "a chain is only as strong as its weakest link". Giving greater weights to low factor scores helps pull down the total score when the entity has low factor scores, reflecting a degraded overall security posture.

Factor and total scores are refreshed and updated daily.

## Breach Penalty

When an organization sustains a data breach, it poses a risk to other entities in its ecosystem. To reflect this risk, its score is reduced by 20% upon disclosure of a breach. The penalty decays (i.e. the score improves) exponentially with a half-life of 30 days and is set to zero after 120 days.



The score history chart above illustrates the impact of a data breach that occurred in late September 2019. The score had been hovering at approximately 80 prior to the breach. The breach penalty initially reduced the score by 20% (from about 80 to about 64) and then decayed away. The company remediated a number of vulnerabilities following the breach and eventually improved their score to 90.

## Keeping the Scoring Framework Current

SecurityScorecard makes every effort to create and maintain cybersecurity ratings that are meaningful, accurate, and relevant.

Since cyber threats are constantly evolving with the emergence of new threats and development of new countermeasures and best practices - much like an arms race - SecurityScorecard continuously monitors the threat landscape and evaluates new data sources and new analytics to better reflect cybersecurity risk.

## Calibration Cadence

As part of this effort, SecurityScorecard recalibrates its scoring algorithm at a regular cadence, monthly. Similarly, credit rating agencies, including FICO, S&P, and Moody's also recalibrate their scoring algorithms periodically, albeit less frequently owing to the relative stability of financial risk ratings criteria compared to cybersecurity risk ratings.

Maintaining a regular scoring update cadence enables SecurityScorecard to preserve fair cybersecurity risk ratings in a dynamic threat environment and also to introduce new issue types reflecting new risk metrics, as needed, to keep users and their ecosystems better informed.

## Industry Comparisons

The calibration and scoring processes described above are applied globally to all organizations on the platform. This approach ensures a large statistical “mass” for reliably measuring and benchmarking the security posture of more than 1.5 million organizations.

Industry Categories			
Construction	Education	Energy	Entertainment
Financial Services	Food	Government	Healthcare
Hospitality	Information Services	Legal	Manufacturing
Non-profit	Pharmaceutical	Retail	Technology
Telecommunications	Transportation		

Each scored organization is assigned an industry tag to facilitate comparisons within and across industries. The total and factor scores of individual companies may be easily benchmarked against others within the same industry, either at a point in time or to examine trends over periods up to 12 months.

Global calibration and scoring also enables comparisons of overall security posture of different industry sectors, which is useful for cyber insurance underwriting and cyber risk assessment at sovereign and national levels.

## Collaboration with End Users


SecurityScorecard maintains a collaborative relationship with its users to improve awareness of cyber risk and to report accurate findings.

Users are provided with a Score Planner tool on the platform which enables them to interactively develop a remediation plan to improve their score. The tool proposes a path to better scores that users may customize according to their preferences.

In addition, users may dispute findings on their scorecard, due, for example, to compensating controls or attribution error, by submitting a refute online along with appropriate evidence. SecurityScorecard reviews each submitted refute and associated supporting evidence and, if warranted, corrects and updates the scorecard. A refute is accepted or denied within 48-hours on average. If accepted, the scorecard is updated between 48-72 hours.

## Validation

SecurityScorecard's scoring algorithm has successfully passed rigorous internal verification and validation testing.

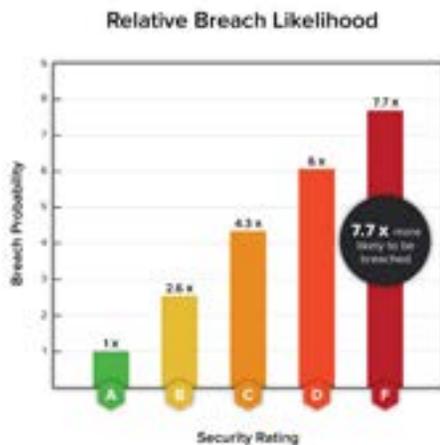

Verification testing is an engineering process to determine whether the algorithm's outputs conform to the inputs. The algorithm is subjected to a battery of statistical tests including edge cases to verify its accuracy and stability.

**Validation testing** determines whether the scoring algorithm satisfies its intended use as a cybersecurity risk assessment tool, i.e. do poor scores correlate with a higher likelihood of an adverse event.

In the credit rating sector, lower ratings correlate with a higher probability of default. For cybersecurity ratings, lower ratings (lower scores) should correlate with a higher likelihood of data breach.

SecurityScorecard analyzed the correlation between score and breach likelihood, based on available breach data. Statistical power is limited by the amount of breach data that is publicly available. The challenge is compounded by the fact that as many as 60-89% of breaches go unreported, since not all organizations are under regulatory obligation to disclose data breaches, although there is a growing movement in the international community to responsibly disclose the occurrence of data breaches.

Validation testing demonstrated that companies with an F rating have a 7.7x greater likelihood of incurring a data breach compared to companies with an A.

## Limitations

While SecurityScorecard's cyber risk ratings can provide substantial insights into the security postures of different organizations and their trends over time, there are some inherent limitations:

- SecurityScorecard employs an “outside-in” approach, which enables external assessment of the cybersecurity posture of organizations non-intrusively, and at scale. However, it is generally not possible to detect the presence of compensating controls internal to an organization's network. In such cases, SecurityScorecard will likely report a score that is too low. However, users may correct their own scores to reflect the presence of compensating controls by submitting a refute together with supporting evidence. A refute is accepted or denied within 48-hours on average. If accepted, the scorecard is updated between 48-72 hours
- The internet is dynamic. Dynamic IPs can be reassigned daily or even hourly. Communication ports can be opened and closed at different times. Changes in domain and IP ownership can occur at any point, but take time to propagate across the internet. The dynamic nature of the internet imposes a fundamental limitation on the accuracy of any process seeking to characterize its current state. Results of such efforts are necessarily probabilistic rather than deterministic. For SecurityScorecard, this means that while scores and attribution are substantially correct, they will always be subject to some errors in the form of false positives and false negatives. SecurityScorecard has developed a suite of algorithms powered by machine learning to minimize these errors and is

continuously enhancing our system architecture to improve update cadences to keep attribution and scoring as current as possible.

## FAQ

**Q: How often are scores updated?**

**A:** Scores are updated and refreshed daily.

**Q: What cybersecurity issues do you track?**

**A:** SecurityScorecard currently tracks around 80 cybersecurity issues, which are topically organized into 10 Factors. A list of all issues and their associated factors and severity-based weights is displayed here.

**Q: I see an IP on my digital footprint that is not mine. How can I trust your attribution?**

**A:** SecurityScorecard performs IP attribution using automated processes operating at scale, using public RIR, DNS, and SSL data as well as third party data sources. Owing to the dynamic nature of the internet, in which IPs can be reassigned to different organizations by the day or even by the hour, IP attribution has a fundamentally probabilistic character and cannot be error-free. A team of independent pentest experts audited a random sample of SecurityScorecard scorecards to objectively determine the accuracy of SecurityScorecard IP and domain attribution.

**Q: Why do scores fluctuate?**

**A:** Scores fluctuate marginally from a regular scoring update cadence (once a month). This enables SecurityScorecard to preserve fair cybersecurity risk ratings in a dynamic threat environment and also to introduce new issue types reflecting new risk metrics, as needed, to keep users and their ecosystems better informed. Outside of scoring updates, scoring of an organization is a purely deterministic process. It is a function of the digital footprint and the number of security issues found. If these are unchanged, then the score will also be unchanged.

**Q: Does SecurityScorecard normalize the score for organizational size?**

**A:** Larger enterprises typically have a larger attack surface than smaller companies. SecurityScorecard levels the playing field to deliver fair scores for organizations of any size using a principled size normalization scheme.

**Q: Is a 1-2 point change in score significant? How about a 5-10 point change?**

**A:** A 5-10 point decline in score is significant and warrants a remediation effort. By comparison, a small change in score (1-2 points) is unlikely to reflect a meaningful change in security hygiene. However, when a score reduction of 1-2 points causes a change in letter grade, for example from a B to a C, there may be a psychological impact despite the immaterial change in score.

**Q: Does SecurityScorecard benchmark against industry?**

**A:** While SecurityScorecard performs scoring globally, each scored organization is assigned an industry tag to facilitate comparisons within and across industries. The total and factor scores of individual companies may be easily benchmarked against others within the same industry, either at a point in time or for examining trends over periods up to 12 months.

## About SecurityScorecard

Funded by world-class investors including Silver Lake Partners, Sequoia Capital, GV, Riverwood Capital, and others, SecurityScorecard is the global leader in cybersecurity ratings with more than 12 + million companies continuously rated. Founded in 2013 by security and risk experts Dr. Aleksandr Yampolskiy and Sam Kassoumeh, SecurityScorecard's patented rating technology is used by over 25,000 organizations for enterprise risk management, third-party risk management, board reporting, due diligence, and cyber insurance underwriting. SecurityScorecard continues to make the world a safer place by transforming the way companies understand, improve and communicate cybersecurity risk to their boards, employees and vendors. Every organization has the universal right to their trusted and transparent Instant SecurityScorecard rating. For more information, visit [securityscorecard.com](https://www.securityscorecard.com) or connect with us on [LinkedIn](#).

When To receive an email with your company's current score, please visit [instant.securityscorecard.com](https://instant.securityscorecard.com).

[www.securityscorecard.com](https://www.securityscorecard.com)  
1 (800) 682-1707  
[info@securityscorecard.com](mailto:info@securityscorecard.com)  
[@security\\_score](#)

### **SecurityScorecard HQ**

111 West 33rd Street Floor 11  
New York, NY 1000110